


## Side Loading Ratchet Removal from Retail Package, 47227.


To remove ratchet from package, (A) lift the ratchet handle up 90 degrees.

(B) Find tabs, push tab (B1), closest to the ratchet barrel in first and lift ratchet slightly, then push tab (B2) to remove the ratchet handle completely, shown in (C)




Lift the back Instruction cover up, then move to (F).




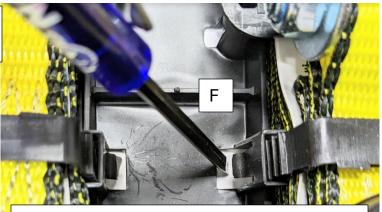


Push your screwdriver through this hole and the paper on the back as shown in (F).

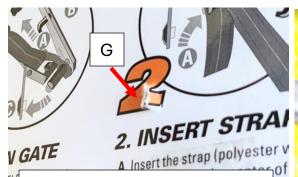

Using this location hole on the back as seen in (G), push your screwdriver up and under the (H) tab on the front side as shown.

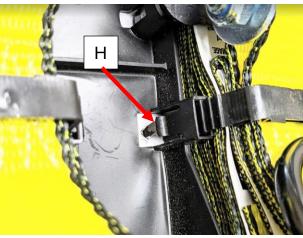

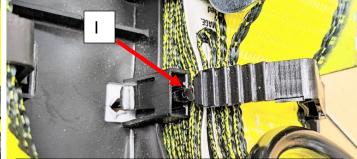

Continuing to push your screwdriver up under the (H) tab you will unsnap the webbing clip as shown in (I). Continue this process for all webbing clips.